

Control limit detection for source apportionment in Perlis River Basin, Malaysia

Mohd Saiful Samsudin ^a, Saiful Iskandar Khalit ^{a, b, *}, Azman Azid ^{a, b}, Hafizan Juahir ^c, Ahmad Shakir Mohd Saudi ^d, Zati Sharip ^e, Muhammad Amar Zaudi ^f

^a Faculty of Bioresources and Food Industry, Universiti Sultan Zainal Abidin, Besut Campus, 22200 Besut, Terengganu, Malaysia

^b UniSZA Science and Medicine Foundation Centre, Universiti Sultan Zainal Abidin, Gong Badak Campus, 21300 Kuala Nerus, Terengganu, Malaysia

^c East coast Environmental Research Institute (ESERI), Universiti Sultan Zainal Abidin, Gong Badak Campus, 21300 Kuala Nerus, Terengganu, Malaysia

^d Institute of Medical Science and Technology, University of Kuala Lumpur, 43600 Kajang, Selangor, Malaysia

^e Water Quality and Environment Research Centre, National Hydraulic Research Institute of Malaysia, 43300 Seri Kembangan, Selangor, Malaysia

^f Department of Environmental Science, Faculty of Environmental Studies, University Putra Malaysia, 43400 UPM Serdang, Selangor, Malaysia


* Corresponding author: saifuliskandar@unisza.edu.my

Article history

Received 9 May 2017

Accepted 5 September 2017

Graphical abstract



Abstract

This study presents the application of selected environmental in the Perlis River Basin. The results show PCA extracted nine principal components (PCs) with eigenvalues greater than one, which equates to about 77.15% of the total variance in the water-quality data set. The absolute principal component scores (APCS)-MLR model discovered BOD and COD as the main parameters, which indicates the measure of the agricultural pollution in the Perlis River Basin, the hierarchical agglomerative cluster analysis (HACA) shows 11 monitoring stations assembled into two clusters in accordance with similarities in the concentration of BOD and COD, which are grouped in P4. The \bar{X} control chart shows that the mean concentration of BOD and COD in P4 is in the control process. The capability ratio (Cp) was applied to measure the risk of the concentration in terms of the river pollution in a subsequent period of time using the limit NWQS.

Keywords: Environmental, water quality, principal component analysis, APCS-MLR, cluster analysis, statistical process control

© 2017 Penerbit UTM Press. All rights reserved

INTRODUCTION

A river is a system that comprises a main course and its tributaries, which carrying the one-way flow of a significant load of matter in dissolved and particulate phases from both natural and anthropogenic sources (Shrestha and Kazama. 2007; Mohd, *et al.* 2011; Najar and Khan.2012; Rashid *et al.* 2013). Surface water is a natural resource essential for life on Earth and plays an important role in everyday human life (Zali *et al.* 2011; Ibrahim *et al.* 2015). In recent years, increasing attention has been given to surface water quality, since it is a component of the natural environment and considered as the main factor for controlling environmental health and potential hazards (Lim *et al.* 2013). The continuous economic expansion and industrialization in Malaysia have resulted in environmental problems with ever-increasing land, air and water pollution (Ho, 1996). During the peak of the agricultural development in the 1960's and 1970's, pollution from the agro-based industries accounted for approximately 90% of the industrial pollution load, while it was the largest source of water pollution during a period when there were inadequate provisions for regulating the discharge of effluents (DOE, 1990). Although there has always been plenty of fresh water in Malaysia, a supply of clean water has not always been available due to an increasing water pollution problem.

The water quality index (WQI) has been considered to provide criteria for surface water classification based on the use of standard parameters for water characterization (Sa'nchez *et al.* 2007). WQI is used as a basis for the assessment of a watercourse in relation to the pollution load categorization and the designation of classes of beneficial uses as stipulated in the National Water Quality Standard of Malaysia (NWQS). Therefore, the NWQS has applied in relation to the surface waters as a guideline for the classification of the different state of the river water quality. The WQI in Malaysia was derived using Dissolved Oxygen (DO), Biochemical Oxygen Demand (BOD), Chemical Oxygen Demand (COD), Ammoniacal Nitrogen (NH₃-N), Suspended Solid (SS), and pH.

Polluted water resources can have huge impact on human being since they can affect their health as well as their living and working environments. Water quality management requires robust methods to assess the influence of various point and non-point sources of pollution (Rode *et al.* 2010; Nigel *et al.* 2010; Zhao *et al.* 2014). Several statistical techniques, such as chemometrics and statistical process control (SPC), are considered as an effective approaches to support water quality management decisions. These techniques are also able to help in interpreting the complex data matrices, especially in the context of water quality and the ecological status of the studied system, which allows for the identification of possible factors/sources that influence

water systems and provides a valuable tool for the reliable management of water sources and a rapid solution to the problem of pollution (Vega *et al.* 1998; Lee *et al.* 2001; Adams *et al.* 2001; Wunderlin *et al.* 2001; Reghunath *et al.* 2002; Simeonov *et al.* 2002; Simeonov *et al.* 2004). In the present study, a large data matrix, obtained during 5-year (2003-2007) monitoring program by the Malaysian Department of Environment (DOE) were taken into consideration to extract the spatio-temporal information for the Perlis River monitoring stations, as part of the river water quality monitoring programme. Thirty physico-chemical parameters were involved in this study.

The objectives of this study were to identify the types of pollution sources at Perlis river basin in terms of different of land uses and surrounding activities, classify the most significant parameters, determine the most significant possible pollution sources for each rivers, which can contribute to river pollution loading, and discover the

potential contamination of pollutants and perform the process capability of water quality in the study area.

EXPERIMENTAL

The watershed size of the Perlis River Basin covers approximately 310 km² with 11 km of length through Kangar city to Kuala Perlis (DID, 2009) as shown in Fig. 1 and Table 1. More than ten streams flow into the Perlis area, while the Perlis River is one of the most important rivers in Perlis. From January to April, the weather is usually hot and dry. From September to December, it is the rainy season with recorded temperatures between 21 °C and 32 °C, while the average annual rainfall is between 2000 ml and 2500 ml per year (Perlis, 2011a; Perlis 2011b).

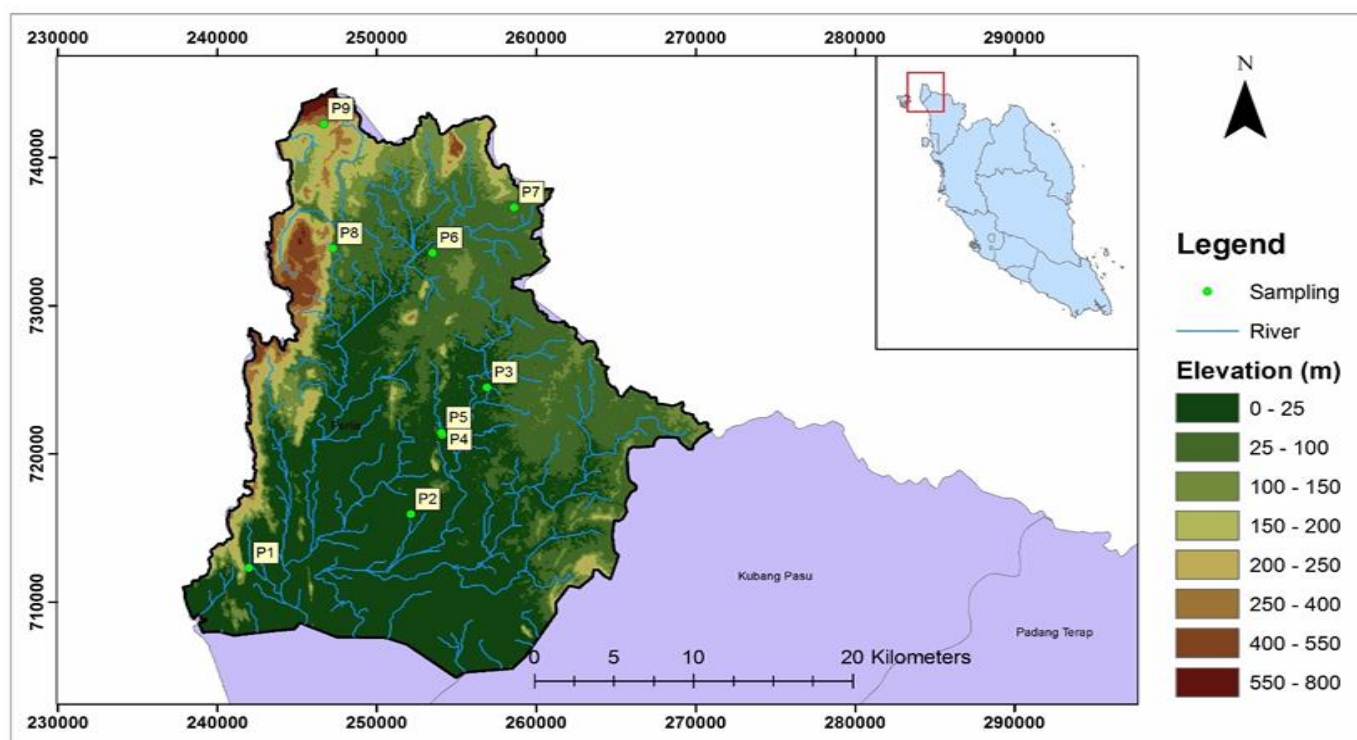


Fig. 1 Map of Perlis River Basin.

Table 1 Information of monitoring stations at Perlis River Basin.

LONGITUDE	LATITUDE	STA No.	RIVER	LOCATION
E 100° 09.426'	N 06° 26.013'	P1	Perlis	Kg. Tebing Tinggi Bridge
E 100° 14.927'	N 06° 28.007'	P2	Ngulang	Ngulang Cross Road's Bridge
E 100° 17.495'	N 06° 32.661'	P3	Serai	Kg. Batu Bertangkep
E 100° 15.978'	N 06° 30.918'	P4	Jernih	Bridge at Beseri
E 100° 15.950'	N 06° 30.996'	P5	Jernih	Kg. Siam
E 100° 15.615'	N 06° 37.574'	P6	Jarum	JPS Telemetry Station Kg. Titi Tinggi Ulu
E 100° 18.382'	N 06° 39.250'	P7	Kok Mak	Kg. Kolam, Padang Besar Road
E 100° 12.219'	N 06° 37.718'	P8	Pelarit	Bridge near JPS Telemetry Station Pelarit River
E 100° 11.893'	N 06° 42.268'	P9	Wang	Perlis State Park

Pre-Processing Data

Preliminary work was undertaken in the data matrix that included assembly and data transformation. The data below the detection limit were substituted with values equal to half the detection limit. Normal distribution tests were carried out with the support of the W (Shapiro-Wilk) test; the agreement of the distribution of the physico-chemical parameters of water with normal distribution was tested (Sojka *et al.* 2008; Juahir *et al.* 2010; Samsudin *et al.* 2011). Standardization was applied to upturn the influence of variables whose variance is small and conversely. Log scaling is very common in environmental data since some of the variables might show very low or very high values.

Principal Component Analysis (PCA)

Principal Component Analysis (PCA) was used to the normalized data set to examine the contrast in the compositional pattern among the analyzed water quality parameters (variables) and recognize the factors that influence each of the parameters (Mutalib *et al.* 2013; Azid *et al.* 2014a; Azid *et al.* 2014b; Rwoo *et al.* 2014; Saudi *et al.* 2014; Kamaruddin *et al.* 2015; Isiyaka *et al.* 2015; Isiyaka and Azid. 2015). The new variable which is known as Principal Components (PCs) are the linear combinations of the original set of variables (Sousa *et al.* 2007; Juahir *et al.* 2011a; Juahir *et al.* 2011b; Ismail *et al.* 2016). Factor loading gives the correlation between the original variables and the VFs, while the individually transformed observations are called factor scores (Vega *et al.* 1998). The VF coefficients having a correlation 0.49–0.30 are considered 'weak' significant factor loadings, correlations in the range of 0.74–0.50 are considered 'moderate' and those in the range of >0.75 are considered 'strong' (Retnam *et al.* 2013; Azid *et al.* 2015).

Absolute Principal Component Scores- Multiple Linear Regressions (APCS-MLR)

The quantitative contribution made by the various identified sources was determined based on the MLR of the Absolute Principal Component Scores (APCS) from the PCA. In APCS-MLR, the predicted influence of each pollution source upon the total concentration was determined using MLR, with the de-normalized APCS values produced by PCA as the independent variables and the measured concentrations of the particular pollutant (Zhou *et al.* 2007). The APCS-MLR model is based on the assumption that the total concentration of each contaminant is made up of the linear sum of the elemental contribution from each pollution component collected (Retnam *et al.*; 2013). Source contributions were calculated after grouping the water quality parameters for each basin in this study into the number of factors and identifying the possible sources by PCA. Therefore, in order to find the source of the contribution, MLR was used to calculate sample mass concentration on the APCS (Simeonova *et al.* 2003).

The coefficient of determination, R^2 , Adjusted R^2 and Root Mean Square Error (RMSE) are the values that need to be considered in determining the best fitting regression linear equation (Azid *et al.* 2014; Dominick *et al.* 2012). R^2 is defined as the proportion of variability in the dependent variable, which is the fundamental measurement of the goodness of the fit of a linear model and is the fundamental measurement of the goodness of the fit of a linear model which is accounted for by the regression equation (Dominick *et al.* 2012; Ilten and Selici. 2008). The performance of the MLR model was assessed using correlation coefficient R^2 , adjusted correlation coefficient R^2 , Schwarz Bayesian Criteria (SBC) and Akaike's Information Criteria (AIC). The best model performance was selected when the R^2 , adjusted R^2 , AIC and SBC values are close to unity (Retnam *et al.* 2013). The minor difference in AIC and SBC indicate the MLR model fit for the prediction of possible pollution sources (Juahir *et al.* 2011a; Retnam *et al.* 2013; Aertsen *et al.* 2010).

Hierarchical Agglomerative Cluster Analysis (HACA)

Hierarchical Agglomerative Cluster Analysis (HACA) is an independent pattern recognition technique that exposes constitutional structure or fundamental behavior of a data set, which is deprived of creating an assumption about data, to categorize the items of the system

into categories or clusters based on their closeness or similarity (Cai *et al.* 2012; Ibrahim *et al.* 2015; Ismail *et al.* 2016). HACA was accomplished with the normalized data set by means of the Ward's method, using Euclidean distances as a measure of similarity and by gathering items into groups, such that items in a cluster were like each other, while things located in other groups had dissimilarities with each other.

Statistical Process Control (SPC) Technique

Statistical Process Control (SPC) is a tool used in the form of control charts, which displays variation by using a set of statistical rules for interpreting the control chart and searching for assignable causes of variation (Maurer *et al.* 1999). The objective of SPC analysis is to eliminate variability in the process. It may not be possible to eliminate variability completely, but the control chart is an effective tool in reducing variability as much as possible. The \bar{x} and R charts are an example of these control charts with a subgroup size of two or more, which are coupled together in the statistical control process. Both charts will determine whether the process is stable and predictable. The \bar{x} chart will display average changes over time and the R-chart will display the range of subgroups changes over time. The \bar{x} and R charts are used for any process with a subgroup size greater than one which the size falls between two and 10.

According to Besterfield (2009), control chart is completed when there is an upper control limit, central line and lower control limit to determine whether the process is stable or not (Saudi *et al.* 2015a; Saudi *et al.* 2015b; Saudi *et al.*; 2015c).

Capability Index

The process capability analysis will assist decision makers in making decisions whether the process is capable of complying with existing environmental legislation or benchmarks that are set for a sufficiently large proportion of time (Corbett and Pan, 2002). A measure of the stable and predictable is shown by the control charts, even though waste is produced. C_p , which is a measure of process capability is a necessary complement to a variables control chart. When the C_p value is 1.33 or greater, the operating personnel have the responsibility of keeping the process centered, stable and predictable. However, when the C_p value is 1.33 or reach a greater amount, the operating personnel are responsible to maintain the process centered, stable and predictable (Douglas, 2009). The process capability and tolerance are combined to form a capability index as defined in the following Eq. (1):

$$C_p = \frac{USL - LSL}{6\sigma_0} \quad (1)$$

where C_p is the capability index, $USL - LSL$ represents the upper specification limit substitute by the lower specification limit or tolerance and $6\sigma_0$ refers to the process capability.

According to Besterfield (2009), when the capability index is 1.00, it is considered as Case (II) situation and if the ratio is greater than 1.00, it will be referred as Case (I) situation which is desirable, and if the ratio is less than 1.00, Case (III) situation will take place which is undesirable. There are three possible situations will occur which is case(I) when the process capability is less than tolerance, (II) when the process capability is equal to the tolerance, and (III) when the process capability is greater than tolerance.

RESULTS AND DISCUSSION

PCA

PCA of the entire data set (Table 2) involved nine PCs with eigenvalues greater than one explaining about 77.15% of the total variance in the water-quality data set. From Table 2, VF1 shows that 29.97% of total variance has strong positive loadings on conductivity, salinity, DS, TS, Cl, Ca, K, Mg and Na, which can be interpreted as a mineral component of the river water. These findings further support Vega *et al.* (1998), who stated that such clustering variables point to a

common origin for these minerals, likely due to the dissolution of limestone and gypsum soils. All the possible pollutants sources have been summarized in Table 3. VF2, shows 9.614% of total variance with strong positive loadings of SS, turbidity and Fe. This VF represents the surface run-off source because of the variables contains. This factor loaded with solids indicates towards their origin in run-off from the fields with high load of solids and waste disposal activities.

VF3 shows that 7.67% of strong variance has strong positive loadings of BOD and COD, on account of anthropogenic pollution sources. This first factor could be explained by considering the chemical components of various anthropogenic activities that constitute point source pollution especially from industrial, domestic, commercial and agricultural areas (Juahir *et al.* 2010a). This VF can be explained by the fact that high levels of dissolved organic matter and biological organic matter derive from agricultural activities (paddy fields) and

industrial activities, based on observations along the Perlis River. VF4 (6.5% of total variance) has strong positive loadings of *E. coli* and coliform. *E. coli* and coliform are strongly related to municipal sewage and waste water treatment plants along the river.

VF5 (5.2% of total variance) has two moderate negative loadings of Pb and Cd. According to Laxen and Harrison (1977), the widespread prevalence of these pollutants noticeably come from leaded petrol. Analysis of land use activities within the study area showed a ferry terminal was based at the mouth of the Perlis River. Ship repairs and maintenance activities could be the potential sources of Pb in the water body. Additionally, the fossil fuel combustion which occurred during the shipping may lead to the presence of Cd. Thus, this can be attributed to the shipping waste pollution. VF6 explained 5.6 % of a strong positive loading of temperature and a strong negative loading of DO.

Table 2 Loadings of nine varimax factors (VFS).

	VF1	VF2	VF3	VF4	VF5	VF6	VF7	VF8	VF9
DO	-0.128	-0.057	-0.261	-0.185	-0.197	-0.703	0.120	0.077	-0.122
BOD	-0.009	0.006	0.957	-0.009	-0.018	0.050	-0.029	-0.041	0.029
COD	-0.002	0.002	0.949	-0.002	0.013	0.020	-0.028	-0.003	-0.013
SS	0.026	0.924	-0.042	0.114	0.053	0.007	0.022	-0.015	-0.046
pH	-0.075	-0.227	-0.434	-0.056	0.060	-0.229	0.540	0.230	-0.209
NH3-NL	0.446	0.027	-0.129	0.154	0.066	0.396	-0.249	0.087	0.155
TEMP	0.083	0.083	-0.008	0.034	-0.106	0.805	0.158	-0.022	-0.178
COND	0.995	-0.011	-0.004	0.004	0.002	0.028	-0.005	-0.003	0.000
SAL	0.995	-0.006	-0.003	0.004	-0.006	0.008	-0.008	-0.002	-0.006
TUR	-0.027	0.930	-0.028	0.066	0.085	0.003	0.005	0.041	-0.025
DS	0.996	-0.009	-0.003	0.003	0.001	0.021	-0.003	-0.001	-0.002
TS	0.995	0.027	-0.005	0.007	0.002	0.022	-0.002	-0.004	-0.002
NO3	-0.088	0.159	-0.063	0.015	0.006	-0.028	-0.165	0.737	0.114
Cl	0.990	0.000	-0.013	0.003	0.012	0.023	-0.030	-0.002	0.005
PO4	-0.010	0.413	0.044	-0.063	-0.279	0.223	0.009	0.229	0.507
As	0.444	-0.036	-0.036	-0.106	-0.196	0.183	0.371	0.235	0.156
Hg	0.157	-0.032	0.028	-0.063	0.072	0.164	0.469	0.185	0.138
Cd	-0.035	-0.050	0.023	-0.073	0.739	0.046	-0.013	0.255	0.037
Cr	-0.021	-0.092	-0.063	0.200	-0.096	0.083	0.744	-0.284	0.058
Pb	0.033	0.217	-0.042	-0.082	0.735	-0.012	-0.060	-0.199	0.044
Zn	0.065	0.629	0.206	-0.181	-0.147	-0.021	-0.219	-0.037	0.216
Ca	0.739	-0.145	0.220	0.056	-0.018	0.066	0.325	-0.110	0.069
Fe	-0.098	0.763	0.081	-0.022	-0.007	0.165	-0.188	0.062	0.139
K	0.982	0.019	-0.015	-0.002	-0.009	0.077	0.017	0.032	0.046
Mg	0.984	-0.020	0.010	-0.004	0.004	0.027	0.037	-0.029	-0.014
Na	0.993	0.006	-0.013	0.006	-0.002	0.008	-0.037	-0.011	0.000
Oil & Grease (OG)	-0.033	0.016	-0.005	-0.137	-0.165	0.196	-0.056	-0.019	-0.746
BAS	-0.020	0.158	0.206	-0.119	-0.096	0.199	-0.104	-0.498	0.425
<i>E-coli</i>	0.059	0.077	0.010	0.929	-0.045	0.065	0.029	0.012	0.013
Coliform	-0.035	0.026	-0.014	0.937	-0.030	0.041	0.044	0.004	0.034
Variability (%)	29.969	9.614	7.668	6.491	5.205	5.601	4.175	3.947	4.476
Cumulative %	29.969	39.583	47.251	53.742	58.947	64.548	68.722	72.669	77.146

Note: Values in bold indicate the variables has strong loading >0.75 and value in bold and italic indicate the moderate loading.

This factor could be attributed to the solubility of gases; the solubility of gases in water will decrease with increasing temperature (Vega et al. 2007; Shrestha and Kazama. 2007).

VF7 (4.18% of total variance) has strong positive loading on Cr. Cr is a specific pollutant that provides evidence of industrial pollution like dyeing or paint operations. From the site survey along Perlis River, the main activities on this river are fishery and agriculture. Anti-fouling paint is used at the bottom of fishermen’s boats to prevent the build-up of algae and other marine life. Therefore, the presence of Cr can be related to the anti-fouling paint from fishermen’s boats. VF8 shows 3.95% of a strong positive loading of NO3, due to agricultural waste based on a nitrate that can be found in the Perlis River. According to Kazama and Yoneyama (2002), this factor represents the contribution of non-point source pollution from paddy fields and agricultural areas. In these areas, farmers use nitrogenous fertilizer, which undergoes nitrification processes, while the rivers receive nitrate nitrogen via groundwater leaching. VF9, which contributed 4.48% of total variance, has one strong negative loading concerning oil and grease. This VF represents non-point source pollution, which can be assumed to be related to oil waste from restaurants along the Perlis River. Fast food restaurants typically produce a low volume of waste water, but higher levels of grease and COD, generated by their daily kitchen activities, for which there is currently no acceptable treatment technology.

APCS-MLR

The R^2 of the APCS-MLR model is 0.734 as shown in Table 3, which indicates 73.4% variability in WQI, which is explained by nine independent variables used in this model. The mean square error (MSE) and the RMSE calculates the residual errors that provide estimation of the mean difference between observed and modelled values of WQI. Based on the coefficient of determination R^2 (0.734), MLR shows good adequacy between measured and predicted value. Although R^2 is less than 0.75 and differs from the published study (Wu et al. 2009), the result are still considered as a good fit as it is more than 0.70. From previous discussions, the number and characteristics of possible pollution sources has been identified by PCA, while source contributions were computed using APCS-MLR, a proven effective approach for supplying quantitative information regarding the contributions of each source type (Pekey et al. 2004). The percentage contribution of each possible source is shown in Table 4, with VF3 showing the highest percentage of BOD and COD. The contributions of BOD and COD concentrations to the Perlis River were 57.43%. The Perlis River is situated near the agricultural and domestic areas. This may be the reason for the higher contribution of this source in the Perlis River Basin. VF3 consists of parameters BOD and COD. High levels of BOD and COD are the result of agricultural wastes that flow into waterways, which are broken down by microorganisms. This process uses oxygen that is needed by river life, including plants and fish, to survive. Higher BOD levels can be attributed to decaying organic materials, which elevate the COD level that also cause increased production in chemical activities by aquatic organisms. The higher contribution of this source suggests that agricultural and domestic waste should be controlled effectively in order to protect this water source.

Table 3 Goodness of fit statistic for regression of WQI

R^2	0.734
Adjusted R^2	0.722
MSE	22.534
RMSE	4.747
AIC	651.445
SBC	684.724

Table 4 Percentage of contribution.

Variable	R^2	Diff R^2	MSE	RMSE	% contribution
All Source	0.734		22.534	4.747	
L-VF1	0.670	0.064	27.800	5.273	11.10
L-VF2	0.721	0.013	23.555	4.853	2.34
L-VF3	0.404	0.330	50.251	7.089	57.43
L-VF4	0.723	0.011	23.346	4.832	1.91
L-VF5	0.734	0.000	22.421	4.735	0
L-VF6	0.631	0.103	31.133	5.580	17.98
L-VF7	0.715	0.019	24.057	4.905	3.38
L-VF8	0.732	0.002	22.588	4.753	0.35
L-VF9	0.703	0.032	25.091	5.009	5.51
Total		0.575			

HACA

HACA was performed on BOD and COD parameter to study the spatial variations of water monitoring stations based on their similarity level since APCS-MLR show VF3 has highest percentage of contribution in Perlis River. The level of concentration of BOD and COD varies with high and low concentration. High level of concentration implies that there is potentially high concentration level of BOD and COD. In contrast, low level of concentration implies that there is potentially low level concentration of BOD and COD in the monitoring stations. For Perlis River, the HACA has successfully grouped the stations into two clusters for each of the parameter.

Based on the Fig. 2, cluster 1 (P4) represents a high level of BOD concentration, while cluster 2 (P1, P2, P3, P5, P6, P7 P8, P9) implies a low level of BOD concentration. These results suggest that station P4 should be monitored frequently as it contains a high level of BOD concentrations. According to Fig. 3, cluster 1 (P4) represents a high level of COD concentration, while cluster 2 (P1, P2, P3, P5, P6, P7, P8, P9) implies a low level of COD concentration. Interestingly, the COD dendrogram result also identified a similar stations with high COD concentration, namely, P4. Therefore, this station should be monitored from time to time in order to reduce the pollutants discharge into the Perlis River.

There are several possible explanations for these results. Natural processes, such as precipitation inputs, erosion and weathering process, as well as anthropogenic activities such as industrial, commercial and agricultural activities, lead to increases in BOD and COD concentration in the river. The Perlis River is known for agricultural activities as well as urban activities. In general, therefore, it seems that station P4 is exposed to all the constant polluting sources that modify surface water hydrochemistry, which in turn increase the level of BOD and COD concentration. Thus, the station P4 should be labelled as the main spot for polluting sources and should be monitored frequently to reduce the BOD and COD concentration in the Perlis River Basin.

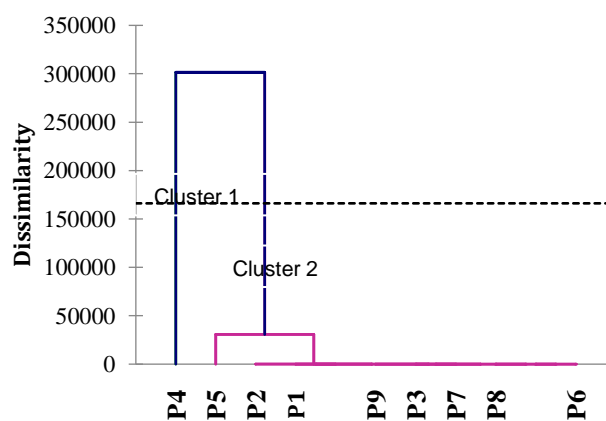


Fig. 2 BOD dendrogram showing classified sampling sites located at Perlis River Basin.

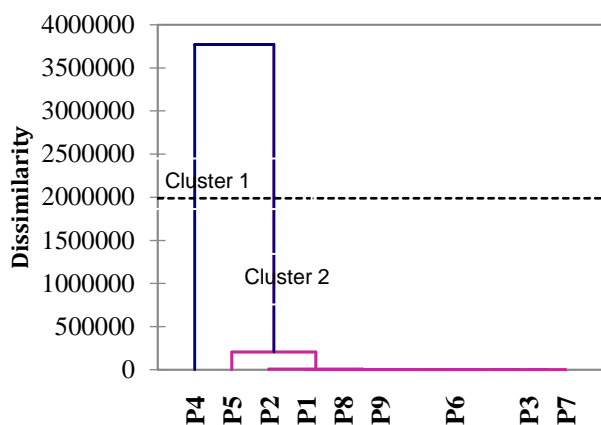


Fig. 3 COD dendrogram showing classified sampling sites located at Perlis River Basin.

\bar{x} and R chart for Perlis River Basin

The \bar{x} and R charts for BOD and COD concentration in the Perlis River Basin between 2003 and 2007 are presented in Figure 4. The first period of data analysis is referred to as a trial control limit or is known as the base period. The trial control limit is shown in Figure 4. Based on the Figure 4a, the central control limit of BOD are exceeding the upper control limit (UCL). In the \bar{x} chart, the central control limit at points 7 and 8 lies outside the control limit, suggesting a possible assignable cause that indicates that 8% of the mean concentrations lies outside the UCL.

In the R charts (Fig. 4b), the central control limit of BOD at points 1, 7 and 8 exceeded the control limits. Three out of 25 points, which indicate that 12% of the mean observations lie outside the control limit in the range chart describing the variation in concentration, are not stable. From this result, it can be suggested that the process is not stable for BOD concentrations. Besterfield (2009) stated that most processes are not in control when analyzed for the first time. According to Maurer (1999), the natural processes are commonly characterized by large variations. When natural processes are coupled with anthropogenic activities, the potential for variation and fluctuation may increase even more as stated by the rule violation (Maurer *et al.* 1999). Therefore, the out of control point should be discarded to get a desirable control limits. The revised control chart is computed by removing all the out-of-control points from the data. In Figure 5a, \bar{x} chart shows the Upper Control Limit (UCL) with the value of 4.0762, Lower Control Limit (LCL), 0.8179 and the central limit of 2.4471. Meanwhile in R chart (Fig 5b) the value of UCL is 5.9689, LCL is 0.0 and the central limit is 2.8235. The revised control charts shows no out of control points outside the control limits area (Fig. 5). This control chart indicates that the process is in good control. Therefore, the control charts can be selected as the representative for the whole process to make the future prediction and measure the risk of pollution. The revised control limit that is established is used for BOD concentration data. The UCL of 4.0762 and LCL of 0.8179 are used. Two mean observations from the other BOD concentration data subgroup are added to the process in order to determine whether the process is stable or not. This is to ensure that the constructed revised control limit can determine whether the process for the other subgroup data is stable or unstable. Based on Fig. 5, when the two observations are added to the process, the \bar{x} charts (Fig. 6a) shows that point 27 is lies below the LCL which can be considered as one of the out-of-control points. However, in the range chart (Fig. 6b), there are no out-of-control points that lies beyond the control limits. Although there is a variation within control limits, it is still considered as a natural variation of the process. This signifies that the mean concentration of BOD in the Perlis River is in the control process.

The \bar{x} and R chart for trial control limit is shown in Figure 7. The \bar{x} chart (Fig. 7a) showed that COD concentration at points 7 and 8 exceeded the control limit, which suggests a possible assignable cause that indicates that 8% of the mean concentrations lies outside the UCL.

In the R charts (Fig. 7b), the mean concentration of COD at points 1, 7 and 8 exceeded the control limits. Three out of 25 points, which indicate that 12% of the mean observations lie outside the control limit in the range chart describing the variation in the concentration, are not stable. From this result, it can be suggested that the process is not stable for COD concentrations. Therefore, the out-of-control point should be discarded in order to obtain desirable control limits. Fig. 8 presents revised control charts following the removal of out-of-control points. The revised control charts (Fig. 8) shows no out of control points outside the control limits' area. This indicates that the process is under good control. Therefore, the control charts can be regarded as representative of the whole process for the purpose of making future predictions and measuring the risk of COD concentration in causing pollution. In Fig. 8a, \bar{x} chart shows the UCL with the value of 44.335, LCL, 15.689 and the central limit of 30.012. In R chart (Fig. 8b) the value of UCL is 52.477, LCL is 0.0 and the central limit is 24.824. Based on the analysis, it can be seen that all the points in the \bar{x} chart were lying in the range. Thus, the controls limits can be selected as representative of the whole process because it shows that there are no out-of-control point lying outside the control limits, thereby indicating that the process is stable. The revised control limit that is established is used for COD concentration data. This attempt was made using the revised control limit that was constructed, as shown in Fig. 9. A UCL of 44.335, a LCL of 15.669 and a central limit of 30.012 were used. Two mean observations from the other COD concentration data subgroup were monitored to determine the stability of the process. Based on Fig. 9, when the two observations are added to the process, \bar{x} and R charts respectively shows all the points' lies between UCL and LCL. This signifies that the mean concentration of COD concentrations in the Perlis River is in the control process.

Process Capability Indices

Data concentration of BOD is found to be within the Upper Specification Limit (USL) and Lower Specification Limit (LSL), with only natural variation occurring. This process is considered to be under statistical control or in a stable process. Therefore, the process performance can be predicted by process capability analysis. The inherent variability of the process is compared with the specification limits in the process capability analysis, such that the environmental performance potential can be detected under normal or in control conditions (Corbett and Pan, 2002). Based on Fig. 10, the capability index (C_p) has been calculated by using the capability analysis to measure the risk of BOD to environment. C_p is used to measure the potential risk of BOD concentration in terms of water pollution. The C_p value is found to be 0.5498 (<1). This shows that the potential risk of BOD concentration in terms of unacceptable water pollution is higher. Based on Fig. 11, the capability index C_p for COD is less than 1.00 which is 0.5141. These indicate the potential risk of COD concentration for unacceptable water pollution is also higher. Thus, this result implies that the process is not suitable in the subsequent significant period of time. This suggests that continuous monitoring should be undertaken by DOE from time to time to ensure that the level of BOD concentration complies with the specification limits that have been set up, namely, a USL is 6mg/l and an LSL is 1mg/l, while COD concentration corresponds to a USL of 50 mg/l and an LSL of 10 mg/l. This specification limit is referred to the NWQS which has been set up by DOE.

This finding concurs with Corbett and Pan (2002), who stated that process capability analysis can help a regulator to decide where to allocate scarce monitoring and audit resources, as well as assist decision makers to assess whether the process is capable of complying with existing environmental legislation over a sufficiently large proportion of time. Therefore, in this analysis, process capability shows that the process is not suitable over the subsequent large period of time.

CONCLUSION

The results from this study show that PCA extracted nine PCs with eigenvalues greater than one, explaining about 77.15% of the total

variance in the water-quality data set. These pollutants are thought to come from mineral components, surface runoff, industrial and anthropogenic waste, sewage, anti-fouling paint (fishery waste), seasonal changes, agricultural waste, food waste and shipping waste. The APCS-MLR model discovered BOD and COD as the main parameters that indicates the measure of agricultural pollution in the Perlis River Basin. According to the HACA, 11 monitoring stations assembled into two clusters were in accordance with similarities in the concentration of BOD and COD. According to the HACA results, BOD and COD were grouped in P4. Next, preventive measures were taken by establishing the control charts for BOD and COD in order to monitor the level of concentration in a timely manner, such that the limit of the concentration level is not exceeded. The results from the control charts show that the mean concentration of BOD and COD in P4 is in the control process. Process Capability Indices were then applied to measure the risk of the concentration in terms of river pollution over a subsequent period of time using the specification limit NWQS. However, both concentration of BOD and COD indicated a high risk of unacceptable levels in the water.

Hence, it is recommended that the related agencies should take actions to control all these sources of pollution in order to improve the water quality in these basins. Laws and regulations can be enforced in a much stricter way to make sure there is no any abuse of the environment. Furthermore, it is recommended that the DOE monitors several significant parameters that contribute to river pollution in these basins, instead of the current number of 30 water quality parameters. The parameters which showed they significantly impacted the water quality in the Perlis River through the data analysis can be used as a reference by the DOE in determining which parameters should be monitored at the monitoring stations. Lastly, it should be stated that protecting our precious natural resources, such as rivers, starts with the individual. Individuals have to play their role in protecting rivers. Various campaigns have been undertaken by the government to protect and rehabilitate rivers, such as the one state one river campaign, and such initiatives will only be successful if the public do their part. Formal education about environmental issues should also be promoted at school level in order to inculcate students with a better understanding of the importance of protecting the environment.

ACKNOWLEDGEMENT

We would like to acknowledge the help and support provided by the East Coast Environmental Research Institute (ESERI), Universiti Sultan Zainal Abidin (UniSZA) and Department of Environment (DOE) during this study conducted.

REFERENCES

Adams, S., Titus, R., Pietesen, K., Tredoux, G. and Harris, C. (2001). Hydrochemical characteristic of aquifers near Sutherland in the Western Karoo, South Africa. *Journal of Hydrology*, 241: 91-103.

Aertsen, W., Kint, V., Orshoven, J. V., Ozkan, K. and Muys, B. (2010). Comparison and ranking of different modelling techniques for prediction of site index in Mediterranean mountain forests. *Ecological modelling*, 221: 1119-1130.

Azid, A., Juahir, H., Aris, A. Z., Toriman, M. E., Latif, M. T., Zain, S. M., Yusof, K. M. K. K. and Saudi, A. S. M. (2014). Spatial analysis of the air pollutant index in the Southern Region of Peninsular Malaysia using environmental techniques. *Proceeding of the International Conference on Environmental Forensics*. 2013. Springer, Singapore. 307-312.

Azid, A., Juahir, H., Ezani, E., Toriman, M. E., Endut, A., Rahman, M. N. A., Yunus, K., Kamarudin, M. K. A., Hasnam, C. N. C., Saudi, A. S. M. and Umar, R. (2015). Identification source of variation on regional impact of air quality pattern using chemometrics. *Aerosol and Air Quality Research*, 15: 1545-1558.

Azid, A., Juahir, H., Toriman, M. E., Kamarudin, M. K. A., Saudi, A. S. M., Hasnam, C. N. C., Aziz, N. A. A., Azaman, F., Latif, M. T., Zainuddin, S. F. M., Osman, M. R. and Yamin, M. (2014). Prediction of the level of air pollution using principal component analysis and artificial neural network techniques: A case study in Malaysia. *Water, Air, & Soil Pollution.*, 225: 2063. Doi: 10.1007/s11270-014-2063-1.

Besterfield, D.H. (2009). Quality control 8th Edition. United State of America: Pearson Prentice Hall

Cai, L., Xu, Z., Ren, M., Guo, Q., Hu, X., Hu, G., Wan, H. and Peng, P. (2012). Source identification of eight hazardous heavy metals in agricultural soils of Huizhou, Guangdong Province, China. *Ecotoxicology and Environmental Safety*. 78: 2-8.

Corbett, C. J. and Pan, J. N. (2002). Evaluating environmental performance using statistical process control techniques. *European Journal of Operational Research*, 139(1): 68-83.

DID (2008). Facts about Sungai Perlis. Retrieved from <http://www.1s1rcommunity.net/index.cfm?&menuid=42&parentid=37>.

Department of Environment Malaysia Report. (1990). Malaysia. Kementerian Sains, T.d.A.S., *Progress in Malaysia Towards Environmentally Sound and Sustainable Development [ESSD] 1976-1990*. 1992: Kementerian Sains, Teknologi dan Alam Sekitar.

Dominick, D., Juahir, H., Latif, M. T., Zain, S. M. and Aris, A. Z. (2012). Spatial assessment of air quality patterns in Malaysia using multivariate analysis. *Atmospheric Environment*, 60: 172-181. 2012

Ho, S. C. (1996). Vision 2020: towards an environmental sound and sustainable development of freshwater resources in Malaysia. *Geosciences Journal*, 40: 73-84. 1996

Ibrahim, A., Juahir, H., Toriman, M. E., Mustapha, A., Azid, A. and Isiyaka, H. A. (2015). Assessment of surface water quality using multivariate statistical techniques in the Terengganu River Basin. *Malaysian Journal of Analytical Sciences*, 19(2): 338 - 348.

Ilten, N. and Selici, A. T. (2008). Investigation the impacts of some meteorological parameters on air pollution in Balikesir, Turkey. *Environment Monitoring Assessment*, 140: 267-277.

Isiyaka, H. A. and Azid, A. (2015). Air quality pattern assessment in Malaysia using multivariate techniques. *Malaysian Journal of Analytical Sciences*, 19(5): 966-978.

Isiyaka, H. A., Juahir, H., Toriman, M. E., Azid, A., Gasim, M. B. and Kamarudin, M. K. A. (2015). Assessment of the spatial variation and source apportionment of air pollution based on chemometric techniques: A case study in the Peninsular Malaysia. *Jurnal Teknologi*, 77(1): 33-44.

Ismail, A., Toriman, M. E., Juahir, H., Zain, S. M., Habir, N. L. A., Rtnam, A., Kamaruddin, M. K. A., Umar, R., Azid, A. (2016). Spatial assessment and source identification of heavy metals pollution in surface water using several chemometric techniques. *Marine Pollution Bulletin*. Doi: 10.1016/j.marpolbul.2015.10.019.

Juahir, H., Retnam, A., Zali, M. A. and Hashim, M. F. (2011). A comparison between multiple linear regression (MLR) and artificial neural network (ANN) for river class prediction at Klang River, Malaysia. In: Zakaria, M.P., Mohamed, M.I., Kasmin, S., Hashim, N.R., Samah, M.A.A., Zainuddin, M.F. and Zaid, S.S.M. (Eds.), *Contemporary Environmental Quality Management in Malaysia and Selected Countries*. Malaysia: Universiti Putra Malaysia Press.

Juahir, H., Zain, M. S., Yusoff, M. K., Ismail, T. T. H., Samah, A. M. A., Toriman, M. E., Mokhtar, M. (2010). Spatial water quality assessment of Langat River Basin (Malaysia) using environmental techniques. *Environmental Monitoring and Assessment*, 173: 625-641.

Juahir, H., Zain, S. M., Yusoff, M. K., Hanidza, T. I. T., Armi, A. S. M., Toriman, M. E. and Mokhtar, M. (2011). Spatial water quality assessment of Langat River Basin (Malaysia) using chemometrics techniques. *Environment Monitoring Assessment*, 173: 625-641.

Kamaruddin, A. F., Toriman, M. E., Juahir, H., Zain, S. M., Rahman, M. N. A., Kamarudin, M. K. A. and Azid, A. (2015). Spatial characterization and identification sources of pollution using multivariate analysis at Terengganu River Basin, Malaysia. *Jurnal Teknologi*, 77(1); 269-273.

Kazama, F. and Yoneyama, M. (2002). Nitrogen generation in the Yamanashi prefecture and its effects on the groundwater pollution. *International Environmental Science*, 15(4): 293-298.

Laxen, D. P. H., and Harrison, R. M. (1977). The highway as a source of water pollution: an appraisal with the heavy metal lead. *Water Research*, 11: 1-11.

Lee, J. Y., Cheon, J. Y., Lee, K. K., Lee, S. Y. and Lee, M. H. (2001). Statistical evaluation of geochemical parameter distribution in a ground water system contaminated with petroleum hydrocarbons. *Journal of Environmental Quality*, 30: 1548-1563.

Lim, W. Y., Aris, A. Z., Praveena, S. M. (2013). Application of the chemometric approach to evaluate the spatial variation of water chemistry and the identification of the sources of pollution in Langat River, Malaysia. *Arabian Journal of Geosciences*, 6:4891-4901.

Maurer, D., Mengel, M., Robertson, G., Gerlinger, T. and Lissner, A. (1999). Statistical process control in sediment pollutant analysis. *Environmental Pollution*, 104(1): 21-29.

Mohd, I., Mansor, M. A., Awaluddin, M. R. A., Nasir, M. F. M., Samsudin, M. S., Juahir, H. and Ramli, N. (2011). Pattern recognition of Kedah River

- water quality data implementation of principal component analysis. *World Applied Science Journal*, 14: 66-72.
- Mutalib, S. N. S. A., Juahir, H., Azid, A., Sharif, S. M., Latif, M. T., Aris, A. Z., Zain, S. M. and Dominick, D. (2013). Spatial and temporal air quality pattern recognition using chemometric techniques: A case study in Malaysia. *Environmental Science: Processes and Impact*, 15(9): 1717-1728. Doi: 10.1039/c3em00161j.
- Najar, I. and Khan, A. (2012). Assessment of water quality and identification of pollution sources of three lakes in Kashmir, India, using multivariate analysis. *Environmental Earth Sciences*, 66(8):2367-2378.
- Nigel, W. T. Quinn, Ricardo, Ortega, Patrick, J. A. Rahilly, Caleb, W. Royer. (2010). Use of environmental sensors and sensor networks to develop water and salinity budgets for seasonal wetland real-time water quality management. *Environmental Modelling & Software*, 25: 1045-1058.
- Pekey, H., Karakas, D., Bakoglu, M. (2014). Source apportionment of trace metals in surface waters of a polluted stream using multivariate statistical analyses. *Marine Pollution Bulletin*, 49: 809-818.
- Perlis (2011a). Lokasi Negeri. Retrieved from http://www.perlis.gov.my/index.php?option=com_content&view=article&id=80&Itemid=195&lang=ms.
- Perlis (2011b). Sepintas Lalu. Retrieved from http://www.perlis.gov.my/index.php?option=com_content&view=article&id=78&Itemid=193&lang=ms.
- Rashid, S. A. A., Gasim, M. B., Toriman, M. E., Juahir, H., Kamarudin, M. K. A., Azid, A. and Aziz, N. A. A. (2013). Water quality deterioration of Jinjang River, Kuala Lumpur: Urban risk case water pollution. *The Arab World Geographer*, 16(4): 349-362.
- Reghunath, R., Murthy, T. R. S. and Raghavan, B. R. (2002). The utility of multivariate statistical techniques in hydrogeochemical studies: An example from Karnataka, India. *Water research*, 36(10):2437-2442.
- Retnam, A., Zakaria, M. P., Juahir, H., Aris, A. Z., Zali, M. A. and Kasim, M. F. (2013). Chemometric techniques in distribution, characterization and source apportionment of polycyclic aromatic hydrocarbons (PAHS) in aquaculture sediments in Malaysia. *Marine Pollution Bulletin*, 69: 55-66.
- Rode, M., Arhonditsis, G., Balin, D., Kebede, T., Krysanova, V., Griensven, A. V., Van Der Zee, S. E. A. T. M. (2010). New challenges in integrated water quality modelling. *Hydrological processes*, 24: 3447-3461.
- Rwoo, M. A., Juahir, H., Azid, A., Sharif, S. M., Roslan, N. M., Zain, S. M. and Toriman, M. E. (2014). Spatial variations of drinking water quality monitoring in water treatment plant using environmetric techniques. In Aris, A.Z., Ismail, T. H. T., Harun, R., Abdullah, A. M. and Ishak, M. Y. (Eds.) *From Sources to Solution, Proceeding of the International Conference on Environmental Forensics 2013* (p. 325). New York: Springer. Doi: 10.1007/978-981-4560-70-2_59.
- Sa'nchez, E., Colmenarejo, M. F., Vicente, J., Rubio, A., Garci'a, M. G., Travieso, L. and Borja, R. (2007). Use of the water quality index and dissolved oxygen deficit as simple indicators of watersheds pollution. *Ecological Indicators*, 7: 315-328.
- Samsudin, M. S., Juahir, H., Zain, S. M. and Adnan, N. H. (2011). Surface river water quality interpretation using environmetric techniques: Case study at Perlis River Basin, Malaysia. *International Journal of Environmental Protection*, 1(5): 1-8.
- Saudi, A. S. M., Azid, A., Juahir, H., Toriman, M. E., Amran, M. A., Mustafa, A. D., Azaman, F., Kamarudin, M. K. A. and Saudi, M. M. (2015). Flood risk pattern recognition using integrated chemometric method and artificial neural network: A case study in the Johor River Basin. *Jurnal Teknologi*, 74(1): 165-170.
- Saudi, A. S. M., Juahir, H., Azid, A. and Azaman, F. (2015). Flood risk index assessment in Johor River Basin. *Malaysian Journal of Analytical Sciences*, 19(5): 991-1000.
- Saudi, A. S. M., Juahir, H., Azid, A., Toriman, M. E., Kamarudin, M. K. A., Saudi, M. M., Mustafa, A. D. and Amran, M. A. (2015). Flood risk pattern recognition by using environmetric technique: A case study in Langat River Basin. *Jurnal Teknologi*, 77(1): 145-152.
- Saudi, A. S. M., Juahir, H., Azid, A., Yusof, K. M. K. K., Zainuddin, S. F. M. and Osman, M. R. (2014). Spatial assessment of water quality affected by the land-use changes along Kuantan River Basin. In Aris, A.Z., Ismail, T.H.T., Harun, R., Abdullah, A.M. and Ishak, M.Y. (Eds.) *From Sources to Solution, Proceeding of the International Conference on Environmental Forensics 2013* (p. 297). New York: Springer,. Doi: 10.1007/978-981-4560-70-2_54.
- Shrestha, S. and Kazama, F. (2007). Assessment of surface water quality using multivariate statistical techniques: A case study of the Fuji river basin, Japan. *Environmental Modelling & Software*, 22: 464-475.
- Simeonov, V., Einax, J. W., Stanimirova, I. and Kraft, J. (2002). Environmetric modeling and interpretation of river water monitoring data. *Analytical and Bioanalytical Chemistry*, 374 (5): 898-905.
- Simeonov, V., Simeonova, P. and Tsitouridou, R. (2004). Chemometric quality assessment of surface waters: two case studies. *Chemical and Engineering Ecology*, 11 (6): 449-469. 2004
- Simeonova, P., Simeonov, V., and Andreev, G. (2007). Water quality study of the Struma river basin, Bulgaria (1989-1998). *Open Chemistry*, 1(2): 121-136.
- Sojka, M., Seipak, M., Ziola, A., Frankowski, M., Murat-Blażejewska, S. and Siepak, J. (2008). Application of multivariate statistical techniques to evaluation of water quality in the Mała Welnia River (Western Poland). *Environmental Monitoring and Assessment*, 147: 159-170.
- Sousa, S. I. V., Martins, F. G., Alvim-Ferraz, M. C. M. and Pereira, M. C. (2007). Multiple linear regression and artificial neural networks based on principal components to predict ozone concentrations. *Environmental Modelling & Software*, 22(1): 97-103.
- Vega, M., Pardo, R., Barrado, E. and Deban, L. (1998). Assessment of seasonal and polluting effects on the quality of river water by exploratory data analysis. *Water Research*, 32: 3581-3592.
- Wu, B., Zhao, D., Zhang, Y., Zhang, X. and Cheng, S. (2009). Multivariate statistical study of organic pollutants in Nanjing reach of Yangtze River. *Journal of Hazardous Materials*, 169(1): 1093-1098. 2009
- Wunderlin, D. A., Diaz, M. P., Ame, M. V., Pesce, S. F., Hued, A. C. and Bistoni, M. A. (2001). Pattern recognition techniques for the evaluation of spatial and temporal variations in water quality. A case study: Suquia river basin (Cordoba, Argentina). *Water Research*, 35: 2881-2894.
- Zali, M. A., Retnam, A. and Juahir, H. (2011). Spatial characterization of water quality using principal component analysis approach at Juru River Basin, Malaysia. *World Applied Sciences Journal*, 14: 55-59.
- Zhao, Y., Sharma, A., Sivakumar, B., Marshall, L., Wang, P. and Jiang, J. (2014). A Bayesian method for multi-pollution source water quality model and seasonal water quality management in river segments. *Environmental Modelling & Software*, 57: 216-222.
- Zhou, F., Huang, G. H., Guo, H., Zhang, W. and Hao, Z. (2007). Spatio-temporal patterns and source apportionment of coastal water pollution in eastern Hong Kong. *Water Research*, 41: 3429 - 3439.

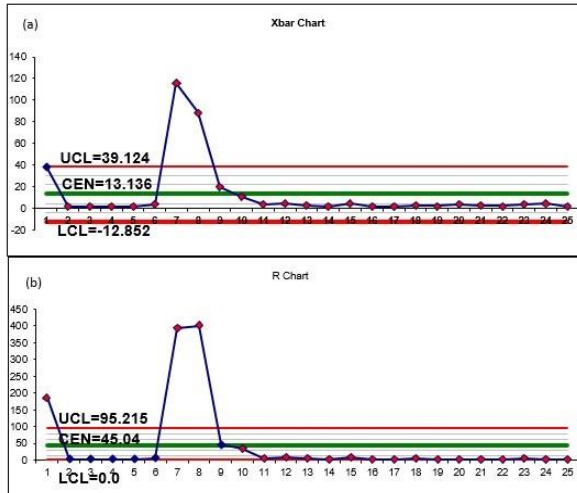


Figure 4. Trial control limit of \bar{x} chart and R chart for the concentration of BOD (mg/L), Perlis River Basin

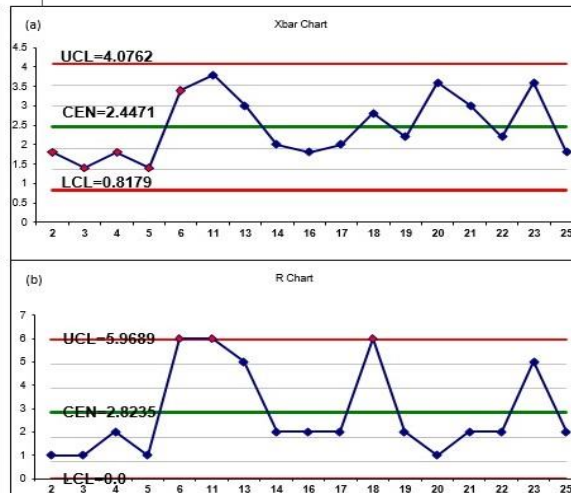


Figure 5. Revised Control Limit in BOD concentration

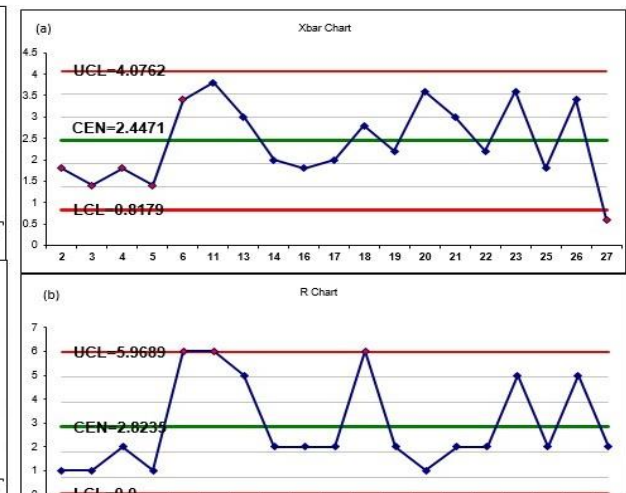


Figure 6. Monitoring of BOD concentration data using the revised control limit

Fig 4-6 Trial, revised and monitoring of BOD concentration.

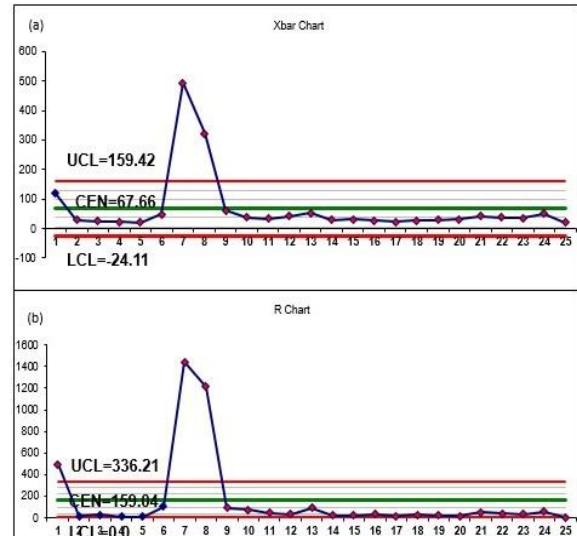


Figure 7. Trial control limit of \bar{x} -bar chart and R -chart for the concentration of COD (mg/L), Perlis River Basin

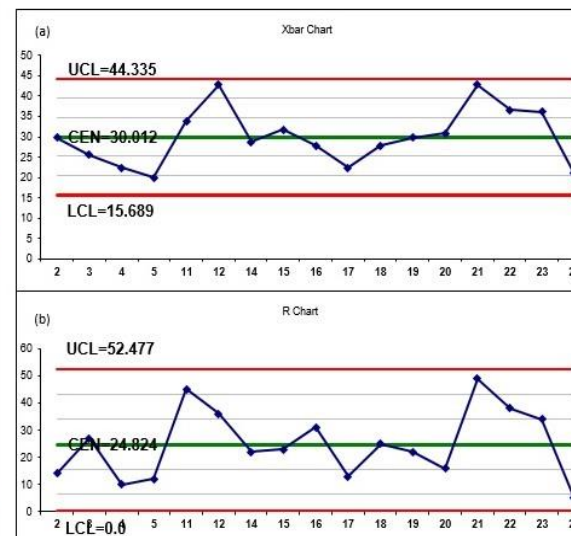


Figure 8. Revised Control Limit in COD concentration

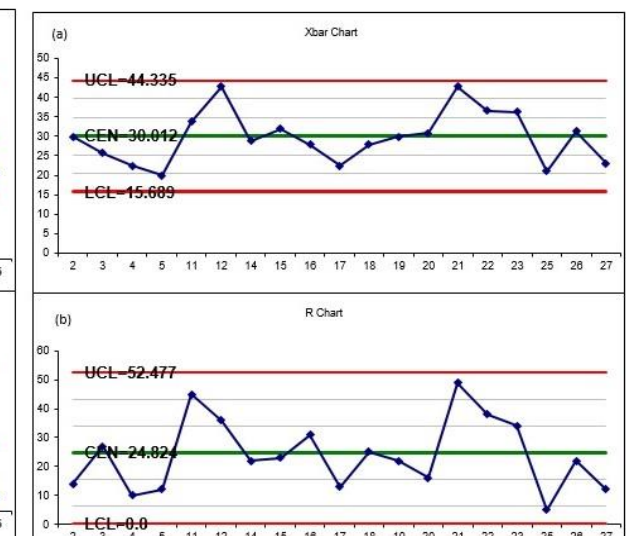


Figure 9. Monitoring of COD concentration data using the revised control limit

Fig. 7-9. Trial, revised and monitoring of COD concentration

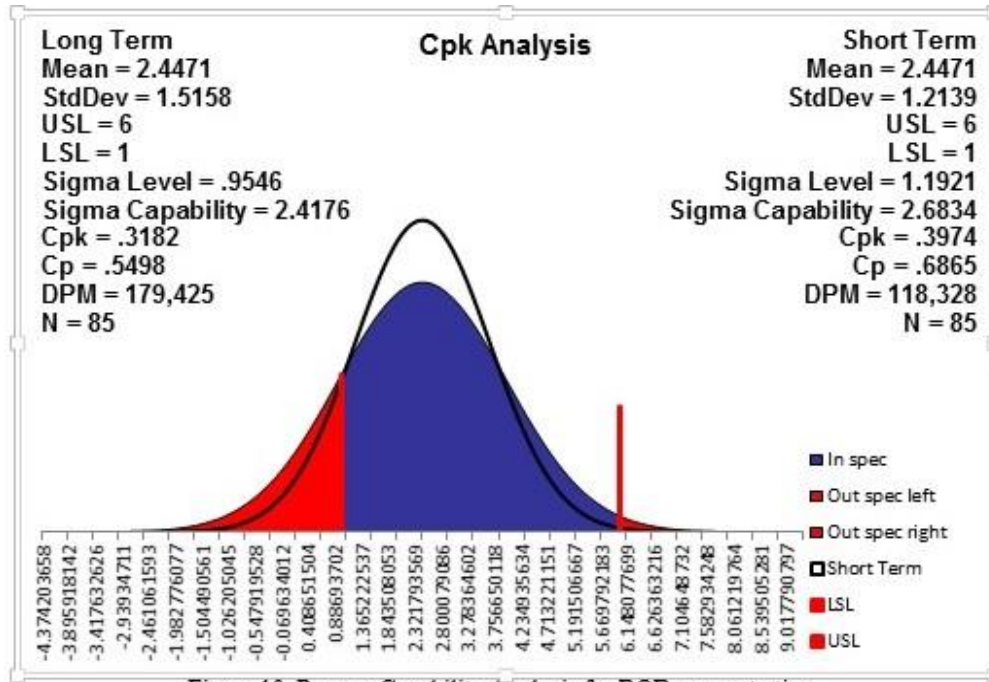


Figure 10. Process Capability Analysis for BOD concentration

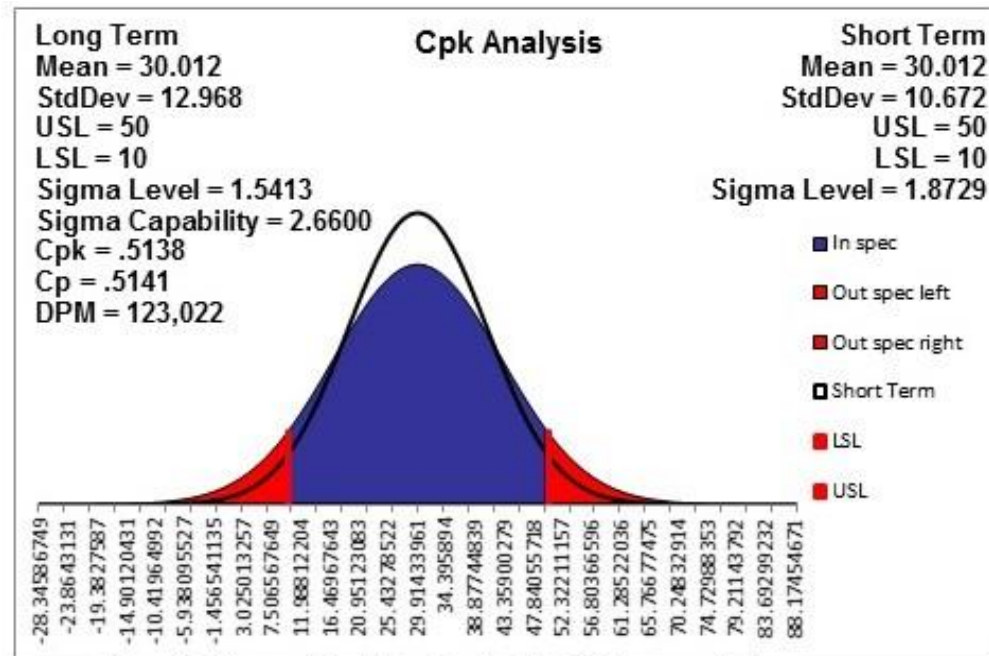


Figure 11. Process Capability Analysis for COD concentration